

SmartFork® SideCam

Perfect view of the load



Features / characteristics



Easy and safe retraction in pallets



Improved lifting of loads



Reduced manoeuvring damages



Both forks in the camera field of view



Aiming along the fork



Unique, semi-integrated camera installation:
Overhang of camera only 0,47"
(instead of approx. $\geq 1,22''$)



Cable routing integrated into the fork



Significantly stronger and more durable solution compared to previous systems

Scope of supply


- ▶ 1 SmartFork® incl. side camera
- ▶ 1 fork as counterpart
- ▶ **Signal output:** SmartFork® monitor
- ▶ **Signal transmission:** Wired
- ▶ **Power supply:** Battery or wired with interface on the fork head

For even higher safety we recommend the combination with SmartFork® Laser.



Monitor view before load pick-up

No risk of being sheared off due to robust camera installation

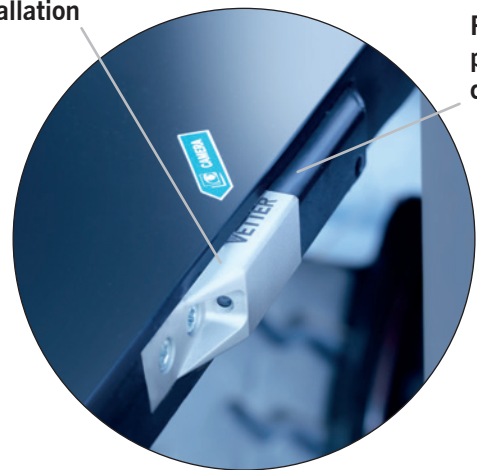

Robust connector protection to prevent damage

Approx. 60 % reduction in installation height due to partially recessed camera

SmartFork® SideCam – semi-integrated camera installation in the lateral fork blade



Optional combination of SmartFork® SideCam and SmartFork® Laser

